

Multilink Aggregation TAP (RJ45)

CUBRO Multilink Aggregation TAP's combine up to 24 10/100 Base-T Links to a single Aggregation Monitor Port and an optical Link extension Port. It helps to save costs for Measuring and Monitoring Test Equipment.



Multilink Traffic Aggregation

Aggregation of up to 24 10/100 Base-T links in one 1000 Base-T Monitor Port. Also units with 4, 8, 12, 16, 20 and 24 Link-Aggregation are available.

Rugged 19" Housing

Stable 19" Housing with precise connector labelling on front panel.
19" 1U high (4, 8 or 12 Links)
19" 2U high (16, 20 or 24 Links)

LINKSAVE Function

Special LINK SAVE Function enables secure Network Links even if the power supply fails. So the TAP does not influence the network, even if it is not powered.

Link Extension

With help of the optional available Port Aggregator you can combine 4 Link Aggregation Taps to extend the total number of Links. So it is possible to aggregate up to 96 10/100 Base-T Links.

LED Indicators


LED's on the front panel indicates power-, link- and activity status.


Easy use and operation

Easy operation and installation.
No PC or software necessary.
No bugs, no software-updates means more time for your business.

Different Power Versions

48V DC or 230VAC power supply versions available.

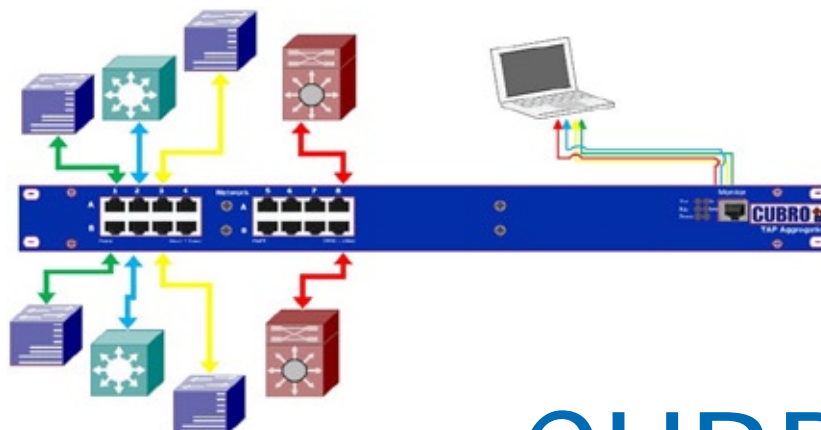



Specifications

Multilink Agregation TAP (RJ45)

Number of Aggregated Links	4, 8, or 12	16, 20, or 24
Network Port	up to 48 x RJ-45	
Monitor Port connector	1 x RJ45	
Link Extension Port	optical SC connector (simplex)	
Network Port Link-Speed	10/100 Mb/s	
Monitor Port Speed	1000 Mb/s	
Operating Temperature	0°C to 55°C	
Storage Temperature	-10°C to 75°C	
Dimension	482,6 x 44,0 x 336,0mm	482,6 x 88,0 x 336,0mm
Power Rating	70W	120W
Power Supply	230V/AC or 48V/DC	
Weigth	4,2 kg	5,2kg

Version 1.0 March 2008

Designed for your demands!

We provide the solutions you need – discuss your requirement with our experts.

For more information contact your local distributor:



Distributed by

DHS ElMea Tools GmbH

Carl Zeiss Strasse 43

63322 Rödermark

ph +49 6074 919908-0

info@dhs-tools.de

www.dhs-tools.de